

WFO5 PRISM OPTIC & MODULES

WFO5 CAPABILITIES

The WFO5 prism optic provides a lightweight, low-cost solution for near-eye viewing devices. It incorporates a patented anamorphic design with state-of-the-art plastic optic manufacturing to ensure the clearest possible image at the lowest possible cost. The WFO5 prism optic simultaneously corrects for geometric distortions and aberrations.

At the same time, it delivers the full SVGA resolution provided by eMagin's SVGA+ and SVGA 3D OLED microdisplays. The WFO5 incorporates features to adapt the OLED microdisplay easily through an integrated optic/display holder design. The assembly permits easy sealing against dust and moisture.

The WFO5's folded optical path and short focal length allow the single-element optical design to deliver the nearly 40 degree field-of-view that many consumer applications require – at the low cost consumer markets require.

Military and industrial applications will also benefit from WFO5's combination of high performance and low cost. Combined with eMagin's OLED microdisplays, the optic enables applications that require compact viewing devices where large amounts information must be accessed immediately.


The WFO5 optic is available as an individual component or sealed to an eMagin OLED microdisplay as the basis for a compact display system.



Lightweight and low cost eMagin's WFO5 Prism Optic delivers field of view of nearly 40 deg with >60% light throughput.

WFO5 OPTIC ADVANTAGES

- Compact, single-element optic for simpler, lighter systems
- Anamorphic design corrects for geometric distortions and aberrations
- Lightweight molded plastic for high-consistency and low unit cost
- Single-piece design provides easy integration of optic

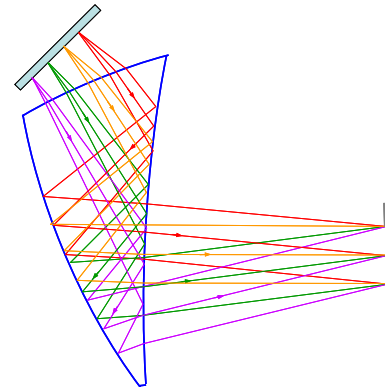

MODULE ADVANTAGES

- Compact, sealed display module for easy integration
- Unsurpassed power efficiency
- Wide field of view in a rugged single-optic design
- Wide operating temperature range
- Full color and monochrome (white, yellow, green, or custom) options
- Long life display

eMagin Corporation

New York
2070 Route 52
Hopewell Junction, NY 12533
tel 845.838.7900
fax 845.838.7901
sales@emagin.com

Washington
10500 8th St NE
Suite 1400
Bellevue, WA 98004
tel 425-749-3600
fax 425-749-3601
www.emagin.com

Japan
1-16-2-405 Yurigaoka
Asao-Ku
Kawasaki-Shi, 215-0011
Japan
tel 81.44.959.4501
fax 81.44.952.3338
virtualjp@aol.com

GENERAL OPERATING CHARACTERISTICS

WEIGHT

- < 11g

FOCAL LENGTH

- 22 mm

WIDE FIELD OF VIEW

- Diagonal – 39.5 deg
- Vertical – 24.2 deg
- Horizontal – 31.6 deg

LIGHT THROUGHPUT

- ~60%

FRONT LUMINANCE

- >70 cd/m² *

EYE RELIEF

- 27 mm

EYE MOTION RANGE

- Vertical 8 mm
- Horizontal 14 mm

PUPIL DIAMETER

- 4 mm *

DESIGN RESOLUTION (MTF)

- 0.3 at 30 lp/mm at center of field
- 0.2 at 30 lp/mm at 0.7 field
- 0.1 at 30 lp/mm at corner of field

COATING

- Aluminized, protected mirror surfaces

DIMENSIONS

- 45 mm (w) x 27 mm (h) x 27 mm (d)

VIDEO INPUTS (FOR MODULE)

R, G, B INPUTS

- 0 to 0.7V, compatible with VESA VSIS standard

VIDEO INPUTS

- SMPTE-170 & PAL (monochrome only)

VIDEO SIGNAL BANDWIDTH

- 56 MHz maximum (VESA SVGA 85 Hz mode)

CONTROL & SERIAL INTERFACE

- Digital 3.3V CMOS

FRAME RATE

- 30 to 85 Hz

POWER INTERFACE (FOR MODULE)

LOGIC/ANALOG SUPPLY (V_{DD})

- 3.3V dc @ 50 mA Max.

OLED SUPPLY (V_{AN})

- 4.0V dc (4.6V maximum) @ 50 mA Max.

OLED RETURN (V_{COMMON})

- -3V dc

CLOCK RECOVERY


- PLL

TOTAL POWER DISSIPATION

- Typically <200 mW @ 60 cd/m² running movie-like video
- 395 mW peak (25°C, 60 Hz, All pixels on)

* Measurements based on use with eMagin SVGA 3D OLED display

MECHANICAL OUTLINE

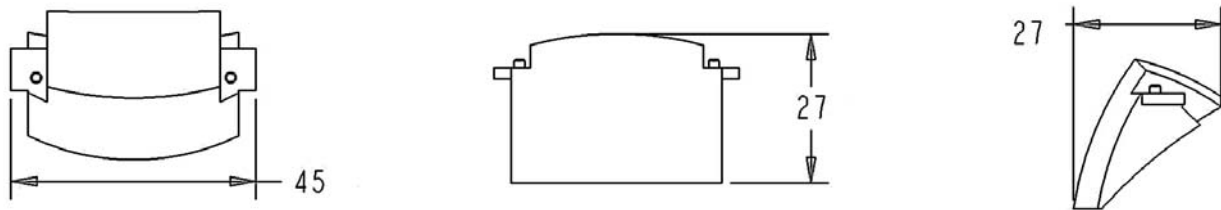

A leader in virtual imaging technology, eMagin integrates high-resolution OLED microdisplays, magnifying optics, and systems technologies to create a virtual image that appears comparable to that of a computer monitor or a large-screen television. With unique technology for producing high-performance small molecule OLED-on-silicon microdisplays and related optical systems, eMagin is the only company to supply these displays in commercial quantities to OEMs. In addition, the company sells integrated modules to military, industrial and medical customers, and has recently announced its first consumer system, the Z800 3DVisor. eMagin's microdisplay operations are co-located with IBM on its campus in East Fishkill, N.Y. Optics and system design facilities are located in Bellevue, WA. For additional information, please visit www.emagin.com and www.3dvisor.com.